



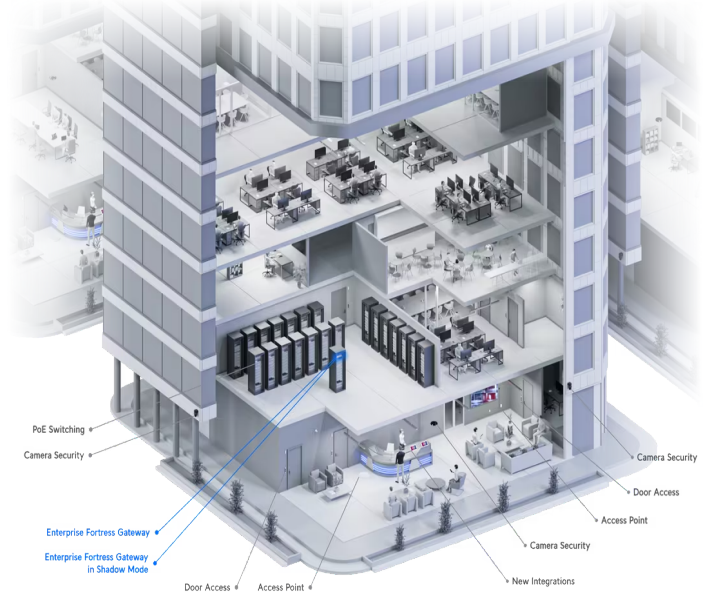

Enterprise Fortress Gateway (EFG)

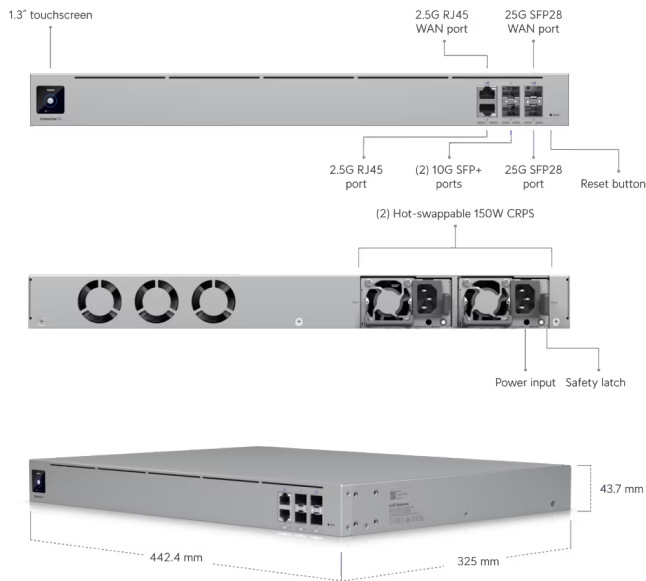

MECHANICAL

Dimensions	442.4 x 43.7 x 325 mm (17.4 x 1.7 x 12.8")
Weight	6.5 kg (14.3 lb)
Enclosure material	Aluminium CNC, SGCC steel

HARDWARE

Processor	18-core ARM® v8.2 at 2 GHz
System memory	16 GB DDR4 DIMM
Management interface	Ethernet Bluetooth
Networking interface	LAN: (1) 25G SFP28 port (2) 10G SFP28+ ports (1) 2.5G RJ45 port WAN:(1) 25G SFP28 port (1) 2.5G RJ45 port
Power method	(1) Universal AC input, 100—240V AC, 7A Max., 50/60 Hz
Power supply	(2) Hot-swappable 150W CRPS
Supported voltage range	100–240V AC
Max. power consumption	82W
ESD/EMP protection	Air: ± 8kV, contact: ± 4kV
LCM display	(1) 1.3" touchscreen
Button	Factory reset
Ambient operating temperature	0 to 40° C (22 to 104° F)
Ambient operating humidity	5 to 95% noncondensing
Certifications	CE, FCC, IC

LEDs

Ethernet	White: Link/activity
SFP+	White: Link/activity
CRPS	Off: No AC power present Steady white: AC power and DC output active Flashing white: AC power present Steady red: AC power lost/failure events Flashing red: Warning events